

Model: OFCB5

Model(s)	Specification
OFCB5	5 Fin, 0.5kW, Thermostat, Power Neon

THESE INSTRUCTIONS SHOULD BE READ CAREFULLY AND RETAINED FOR FUTURE REFERENCE.

As with all portable heating appliances - This product is only suitable for well insulated spaces or occasional use

IMPORTANT SAFETY ADVICE

DO NOT cover the radiator or place material or garments on it or between the fins.



The radiator carries the warning symbol indicating that it must not be covered.

DO NOT use the heater in the immediate surroundings of a bath, a shower or a swimming pool.

DO NOT place the heater directly below a fixed socket outlet.

WARNING: In order to avoid a hazard due to inadvertent resetting of the thermal cut-out, this appliance must not be supplied through an external switching device, such as a timer, or connected to a circuit that is regularly switched on and off by the utility.

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience or knowledge if they have been given supervision or instruction concerning the use of the appliance in a safe way and understand the hazards involved. Cleaning and user maintenance shall not be made by children without supervision.

Children of less than 3 years should be kept away unless continuously supervised. Children aged from 3 years and less than 8 years shall only switch on/off the appliance provided that it has been placed or installed in its intended normal operating position and they have been given supervision or instruction concerning the use of the appliance in a safe way and understand the hazards involved. Children aged from 3 years and less than 8 years shall not plug in, regulate and clean the appliance or perform user maintenance.

CAUTION: Some parts of this product can become very hot and cause burns. Particular attention has to be given where children and vulnerable people are present.

WARNING: Avoid use of an extension cord because the extension cord may overheat and cause risk of fire.

If the mains lead is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.

DO NOT obstruct the air circulation around the radiator, for example with curtains or furniture, as this could cause overheating and a fire risk. See 'Positioning the Radiator'.

This heater is filled with a precise quantity of a special oil. Repairs requiring opening of the oil container are only to be made by the manufacturer or his service agent who should be contacted if there is an oil leak

When scrapping the heater, follow the regulations concerning the disposal of oil.

This radiator must be used on an AC ~ supply only and the voltage marked on the heater must correspond with the supply voltage.

This radiator complies with stringent safety standards but to ensure efficient operation SURFACES OF THE RADIATOR WILL BECOME HOT AND CONTACT WITH THESE AREAS SHOULD BE AVOIDED, particularly between the fins.

The control panel area is designed to be cooler and allow safe operation of the controls at all times.

If young children, the aged or infirm are likely to be left in the vicinity of the heater, we advise that adequate precautions should be taken. We recommend that a guard be fitted to ensure contact with the heater is avoided and objects cannot be inserted into the product.

DO NOT USE the radiator if it has been dropped or damaged or the mains lead has been damaged, until it has been examined by a qualified engineer.

DO ENSURE that the mains lead cannot be tripped over.

DO NOT operate the radiator with the mains lead overhanging the fins.

DO NOT USE THIS RADIATOR WHEN IT IS LYING ON ITS SIDES. If the radiator is tipped over, unplug it and allow it to cool before standing it back up.

Electrical

WARNING – THIS APPLIANCE MUST BE EARTHED

The heater is fitted with a plug incorporating a 13 amp fuse. When replacing the fuse, a 13 amp fuse approved by ASTA to BS 1362 must be used. If the plug is not suitable for the socket outlets in your home, the plug must be cut off and an appropriate one fitted.

IMPORTANT: The wires in this mains lead are coloured in accordance with the following code:

BLUE:	NEUTRAL
BROWN:	LIVE
GREEN & YELLOW:	EARTH

As the colours of the wires in the mains lead may not correspond with the coloured markings in your plug, proceed as follows:

Connect the **BROWN** wire to the terminal marked 'L' or coloured **RED**. Connect the **BLUE** wire to the terminal marked 'N' or coloured **BLACK**. **Note:** 'L' or 'N' must not be connected to the **EARTH** terminal marked 'E' or  or coloured **GREEN** or **GREEN AND YELLOW**.

If in doubt, consult your electrician.

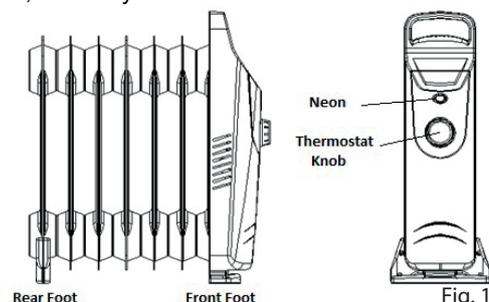


Fig. 1

Assembling the heater

Remove all parts of the heater from the packaging. Before assembling the heater please ensure the heater body and all parts are free from oil and that the supply cord and plug are undamaged. Turn the radiator upside down on a carpet or other soft surface to avoid damage as shown in (A) Fig. 2. Please ensure that it is supported to prevent it from toppling.

Slide the front foot onto the slide way, located on the bottom of the front panel, until you hear a click. See (B) Fig. 2.

Then take the rear foot and slide it onto the bottom of the rearmost fin, as shown in (C) Fig. 2, until you hear a click. Ensure that the face with the screw holes face inwards.

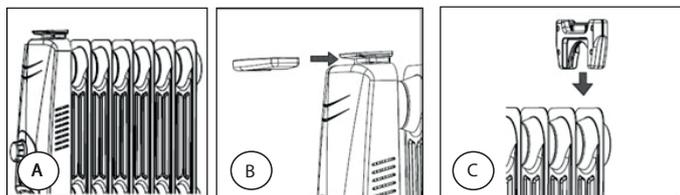


Fig. 2

Lift the radiator clear of the floor, then turn it back upright and stand it on its feet. It is now ready for use.

Positioning the radiator

Always ensure that the radiator is stood on a firm, level base near to, but not directly beneath, a suitable fixed socket outlet. Unwind the mains lead fully before plugging in the radiator. DO NOT pull the radiator along by the mains lead.

Ensure that curtains and furniture are not closer than 1 metre from the chosen position, as this would create a potential fire hazard. Ensure that there is at least 300mm above the radiator of unobstructed space.

Before switching on

Ensure that all packing items are removed (read any warning labels carefully) and that all warnings and instructions have been read carefully and followed.

Operation

When you are certain that you have completed the above, plug in and switch on at the wall socket. The neon will glow when the product is operating.

Please Note – We recommend that you open a window to ventilate the room when using the heater for the first time.

Thermostat control - see Fig. 3




Fig.3

The heat output is controlled by the thermostat, according to the room temperature. Turn the knob clockwise to the maximum setting. When the room is warm enough, reduce the setting slowly until the radiator just clicks off. The radiator will now cycle on and off to maintain your selected room temperature.

When the knob is turned to position marked "0" the radiator will give a small click and the

radiator is powered off.

Note: If the radiator does not come on when the thermostat is on a low setting, this is normally because the room is warmer than the thermostat setting and is not a fault.

Safety - Overheat protection

For your safety this appliance is fitted with a thermal cut-out. In the event that the product overheats for some reason, the cut-out prevents excessive temperatures on the product by cutting the power to the heater. Once the radiator has cooled down, it will reset automatically, it will continue to cycle on and off automatically until the reason for overheating is removed.

Tilt Switch

The product is fitted with a safety tilt switch which will prevent it from operating should the heater be tilted more than 45° from vertical. In the event that the heater tips over the tilt switch will prevent the heater from operating, unplug the heater and allow it to cool before standing it back up.

Cleaning

WARNING: Always disconnect from the power supply and allow the radiator to cool before cleaning.

Do not use detergents, abrasive cleaning powder or polish of any kind on the body of the radiator, as these can damage the finish. Wipe the radiator with a dry cloth to remove dust and a damp cloth (not wet) to clean off stains.

Be careful not to allow moisture into the control area.

Recycling

 For electrical products sold within the European Community. At the end of the electrical products useful life it should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice in your country.

After Sales Service

Your product is guaranteed for 1 year from the date of purchase. The 1 year guarantee is extended for an additional 2 years when you register the product with Dimplex, within 28 days of purchase. If you do not register the product with Dimplex within 28 days, your product will remain guaranteed for 1 year only.

Within the extended guarantee period we undertake to repair or exchange this product free of charge providing:

- Proof of purchase such as a sales receipt should be provided, showing that the appliance was bought within the 36-months prior to registering the defect/fault.
- The appliance was correctly installed and operated in accordance with the manufacturer's instructions and used solely for domestic purposes.
- The defect/fault was not as a result of accident, misuse, unauthorised modification or inexpert repair

Your rights under this guarantee are additional to your statutory rights, which in turn are not affected by this guarantee.

To validate your extended guarantee register with us online at <http://register.dimplex.co.uk>

N.B. Each qualifying product needs to be registered with Dimplex individually.

Please note that the extended guarantee is only available in the UK and Ireland

If after following these steps your product still does not operate you should return it to your point of purchase.

Please do not return a faulty product to us as this may result in loss or damage and delay in providing you with a satisfactory service.

Model Identifier(s):	OFCB5		
Heat output			
Nominal heat output	P _{nom}	0.5	kW
Minimum heat output (indicative)	P _{min}	0.0	kW
Maximum continuous heat output	P _{max,c}	0.5	kW
Auxiliary electricity Consumption			
At nominal heat output	e _{lmax}	0.0	kW
At minimum heat output	e _{lmin}	0.0	kW
In standby mode	e _{lSB}	0.0	kW
Type of heat output/ room temperature control			
With mechanical thermostat room temperature control			Yes
Contact details	GDHV, Milbrook House, Grange Drive, Hedge End, Southampton, SO30 2DF		