

DAB (Recessed) Ambient models

Technical Specifications



	DAB10AR	DAB15AR	DAB20AR*
Max mounting height (m)	4.0	4.0	4.0
Air volume (m³/h)			
speed 1	3000	3500	6000
speed 2	2665	2315	5330
Maximum air flow (m/s)			
speed 1	13.5	13.0	13.5
speed 2	12.0	8.6	12.0
Air off temp. (°C)			
speed 1	-	-	-
speed 2	-	-	-
Heat output (kW)	-	-	-
Flow rate (l/s)	-	-	-
Pressure drop (kPa)	-	-	-
**dB(A) level @ 3.0m			
speed 1	58	59	60
speed 2	52	53	54
Supply rating (*per phase) (A)	1.5	2.3	1.5 per unit
Supply voltage (50Hz)	230V~ 1P&N	230V~ 1P&N	230V~ 1P&N per unit
IP Rating	IPX0	IPX0	IPX0
Weight (kg)	26.5	35.5	53.0

* Dimplex modular range supplied as two units.




**dB (A) level measured outside of air stream.



DAB (Recessed) Ambient models

Dimensional Specifications

	DAB10	DAB15	DAB20
Dimension A	1168	1718	2268
Dimension B	1102	1652	2202
Dimension C	800	1300	800 (x2)
Dimension D	1057	1557	2114

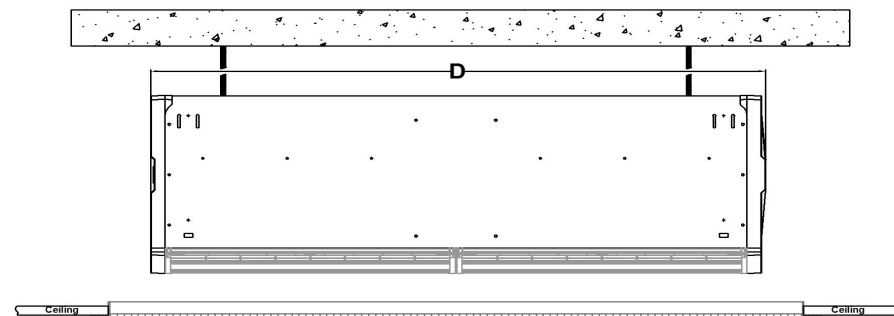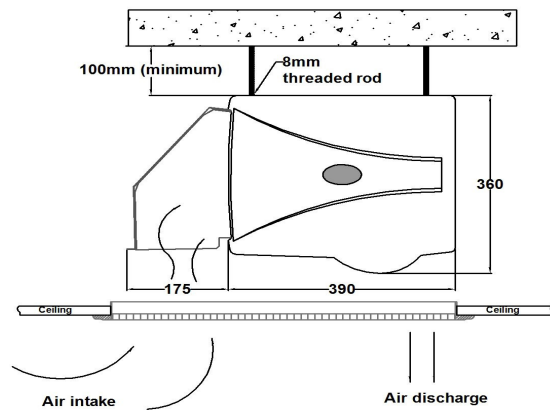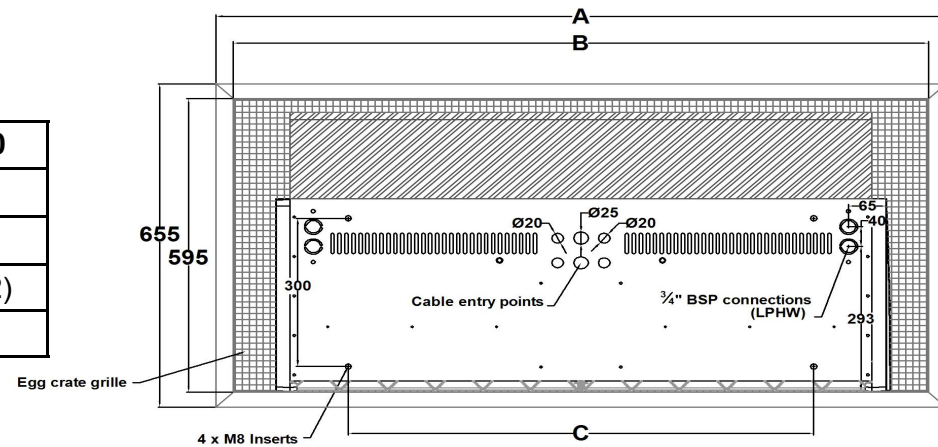

Note: A clearance distance of 300mm must be provided adjacent to the air intake grille.
All dimensions are in mm, unless otherwise stated.