


Dimplex Optimyst Wall Fire Pebble Accessory Pack 051820

This leaflet will describe how to remove the fuelbed for access to the water tank with reference to your instruction manual

FILLING THE WATER TANK

When the water tank is empty, the flame and smoke effect shuts off and you will hear 2 audible beeps, follow these steps.

1. Press Switch 'A' to **(0)** (See Fig.10 in your instruction manual)
2. Remove the individual pebbles. Gently lift out the metal fuelbed and carefully set aside.
3. Remove the water tank by lifting upwards and outwards.
4. Place the water tank in sink and remove cap, Anti-clockwise to open. (Fig 7 in your instruction manual))
5. Fill tank with **filtered tap water only**. This is necessary to prolong the life of the flame and smoke producing unit.
The water should be filtered through a conventional domestic water filter unit and the filter should be replaced regularly.
6. Screw the cap back on, do not over tighten.
7. Return the tank to the sump, with the tank cap facing down and the flat side of the tank facing outward. (Fig 8 in your instruction manual))
8. Gently place the metal fuelbed back into position - with the opening towards to back of the fire.
9. Replace the individual pebbles upon the metal fuelbed, ensuring that the pebbles do not block the opening.
10. Press Switch 'A' to 'ON' **(I)** position (See Fig.10 in your instruction manual)

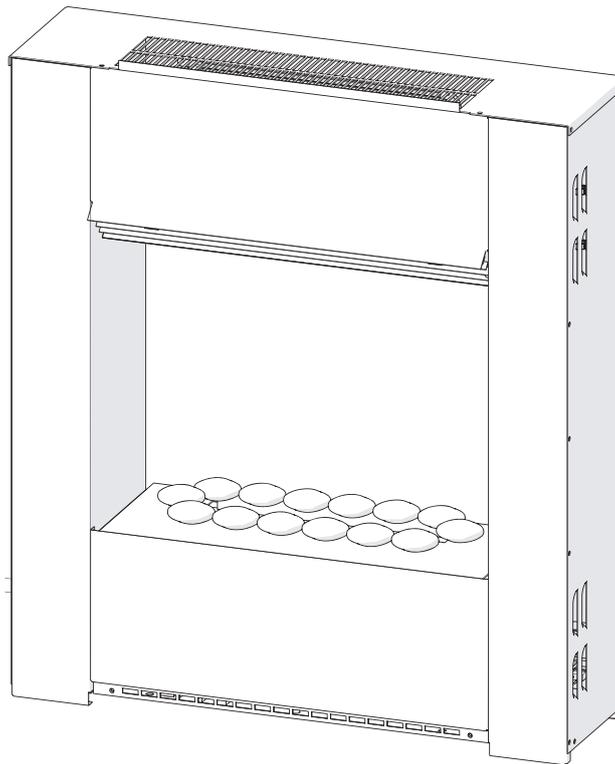

8/52176/0 ISSUE1

GDC Group Ltd.
MILLBROOK HOUSE
GRANGE DRIVE
HEDGE END
SOUTHAMPTON
SO30 2DF

TEL: 0844 879 3588
FAX: 0844 879 3583
WEBSITE: www.dimplex.co.uk
Republic of Ireland Tel. 01 8424833