

## Contact Details

Please note that some of the contact details on this PDF document may not be current.

Please use the following details if you need to contact us:

Telephone: 0844 879 3588

Email: [customer.services@gdcgroup.co.uk](mailto:customer.services@gdcgroup.co.uk)

The customer support section of our website also features a wide range of information which may be of use to you and is available 24 hours a day. It includes:

- Operating and installation instructions
- Easy 'How to use' guides for storage heaters
- Service and repairs
- Where to buy our products
- Literature downloads
- Heating requirement calculator

Visit - [www.dimplex.co.uk/support](http://www.dimplex.co.uk/support)


# Quick Start Guide

## RPX Electronic Radiant Panel Radiator

QS021

This guide is for quick reference only. Refer to the RPXN installation and operating instructions for further information

### RPX radiant panel radiator

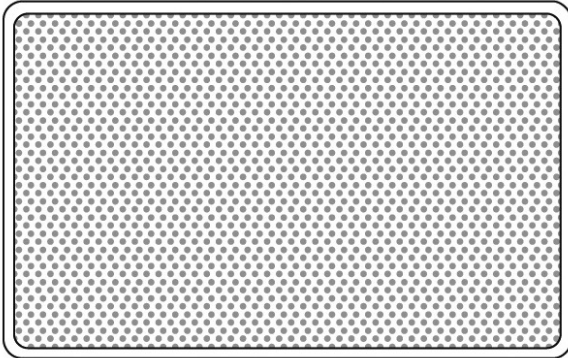


### General

- Use the heater in comfort mode ☀ when the room is occupied.
- Use the heater in set back (background) mode 🌙 when the room is unoccupied. It is more energy efficient to do this than switch the heater off.
- Use the heater in frost protection mode ❄ if you are away for long periods of time.

### Heater controls

- (A) **Function selector:** see table below for functions available
- (B) **Function display:** will illuminate to show which function has been selected with the function selector
- (C) **Thermostat:** set the thermostat control to the appropriate position to give comfort level required. Heater will switch on and off as necessary, and a higher setting will make the room warmer.
- (D) **Thermostat indicator:** will illuminate to show when heater is delivering heat
- (E) **Cover opening tab**

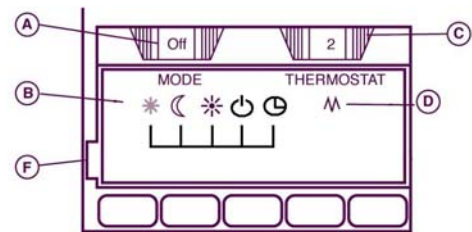

- (A) Function Selection
- (B) Function Display
- (C) Thermostat
- (D) Thermostat Indicator
- (E) Cover Opening Tab

### Function selector table

Symbol	Function	Description
☀	Comfort	Heater will maintain the temperature set on the thermostat dial
🌙	Background (setback)	Heater will maintain a lower temperature level for background heating (preset to -3.5°C)
0	Off	Heater will not function
🕒	Programme	Heater will be controlled by a programming device

**\*Note:** If the programme function is selected but no programming device is being used, the heater will function in comfort mode.