






Device information	SI 22TU
<b>Design</b>	
- Heat source	Brine
- Model	Universal design
- Regulation	WPM EconPlus, integrated
- Thermal energy metering	Integrated
- Installation location	Indoors
- Performance levels	1
<b>Operating limits</b>	
- Max. flow temperature <b>7)</b>	58 °C +/- 2
- Lower operating limit heat source (heating operation) / Upper operating limit heat source (heating operation)	-5 / 25 °C
- Antifreeze	Monoethylenglycol
- Minimum brine concentrate	25 %
<b>Flow / sound</b>	
- Max. heating water flow rate / Pressure drop	4 m³/h / 31000 Pa
- Minimum heating water flow rate / Pressure drop	1,9 m³/h / 5000 Pa
- Heat source flow (min.) / Pressure drop evaporator EN 14511	5,5 m³/h / 34000 Pa
- Sound power level device	53 dB (A)
- Sound pressure level in 1 m (indoors) <b>2)</b>	41 dB (A)
<b>Dimensions/weight and filling quantities</b>	
- Dimensions (W x H x D) <b>3)</b>	650 x 845 x 665 mm
- Weight	184 kg
- Thread type, heating connection / Connection heating	G / 1 ¼ inch
- Thread type, heat source connection / Heat source connection	G / 1 ½ inch
- Refrigerant / Amount of refrigerant	R407C / 3,7 kg
- Oil type / Oil quantity	Polyolester (POE) / 2,5 l
- Water content	3,8 l
<b>Electrical connection</b>	
- Rated voltage / Fuse protection	3/PE ~400 V, 50 Hz / C 20 A
- Control voltage / Control voltage fuse protection	1/N/PE ~230 V, 50 Hz / C 16 A
- Degree of protection	IP 20
- Initial current limiter	Yes
- Starting current with soft starter	25 A
- Rotary field monitoring	No
- Nominal power consumption according to EN 14511 at B0/W35 / Maximum electric power consumption <b>1)</b>	4,93 / 8,1 kW
- Nominal current at B0/W35 / Nominal current cos phi	10,5 A / 0,7
<b>Complies with the European safety regulations</b>	
<b>Additional model features</b>	
- Water in device protected against freezing <b>4)</b>	Yes


**Heat output / coefficient of performance (COP) according to EN 14511: 1)**

Heating compressor 1	W35	W45	W55
B-5	18,60 kW / 2,5	19,02 kW / 3,15	18,60 kW / 2,46
B0	22,90 kW / 4,40	22,30 kW / 3,60	21,50 kW / 2,90
B5	25,50 kW / 4,83	25,00 kW / 3,94	24,50 kW / 3,26
B10	28,50 kW / 5,35	27,50 kW / 4,29	26,50 kW / 3,50
B25	37,24 kW / 6,93	35,50 kW / 5,43	34,00 kW / 4,44

**Note:**

- 1) This data indicates the size and capacity of the system according to EN 14511. For an analysis of the economic and energy efficiency of the system, the bivalence point and regulation should be taken into consideration. These specifications can only be achieved with clean heat exchangers. Information on maintenance, commissioning and operation can be found in the respective sections of the installation and operating instructions. The specified values have the following meaning, e.g. A7 / W35: Heat source temperature 7 °C and heating water flow temperature 35 °C.
- 2) The specified sound pressure level corresponds to the operating noise of the heat pump in heating operation with a flow temperature of 35°C. The specified sound pressure level represents the free sound area level. The measured value can deviate by up to 16 dB(A), depending on the installation location.
- 3) Please note that additional space is required for pipe connections, operation and maintenance.
- 4) The heat circulating pump and the heat pump manager must always be ready for operation.
- 7) Depending on the heat pump type and refrigerant used, the maximum flow temperatures in heating operation may be reduced when the outside temperature falls. Further information can be found in the operating limit diagram for the heat pump. If the supporting feet are used, the level can increase by up to 3 dB (A).

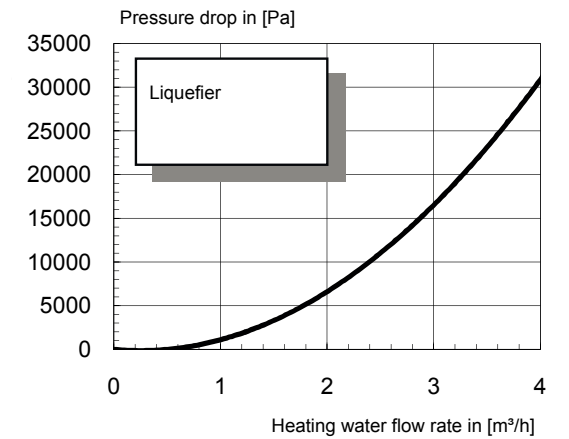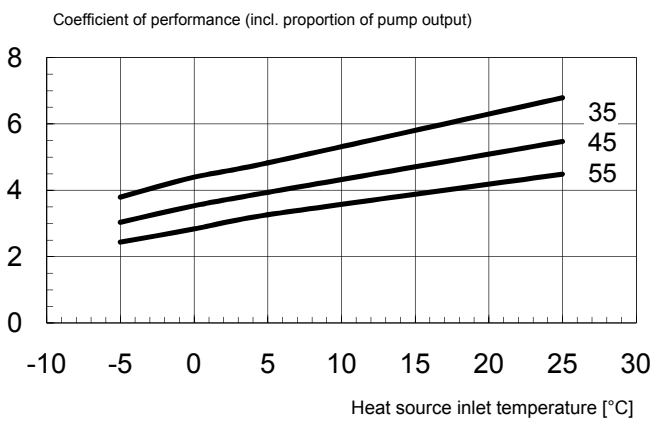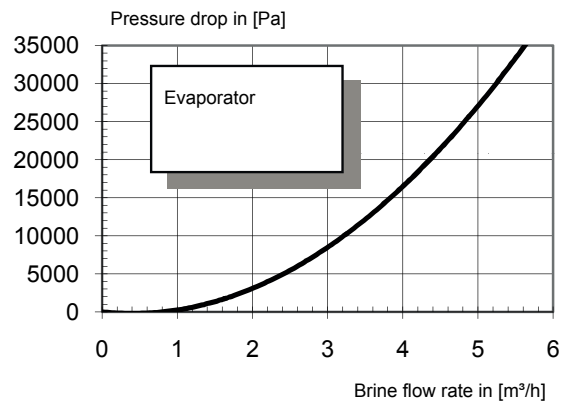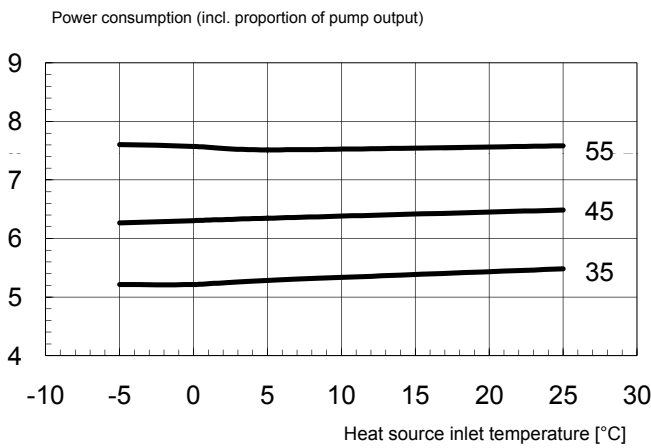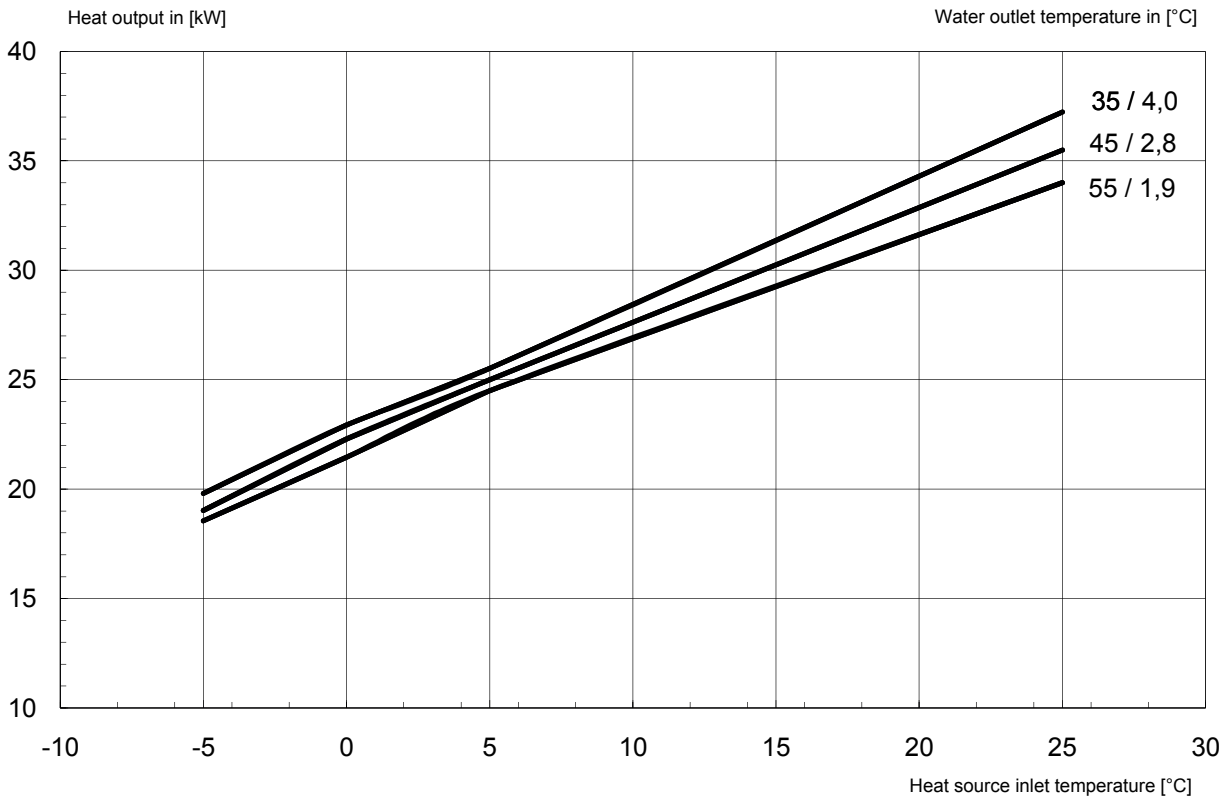

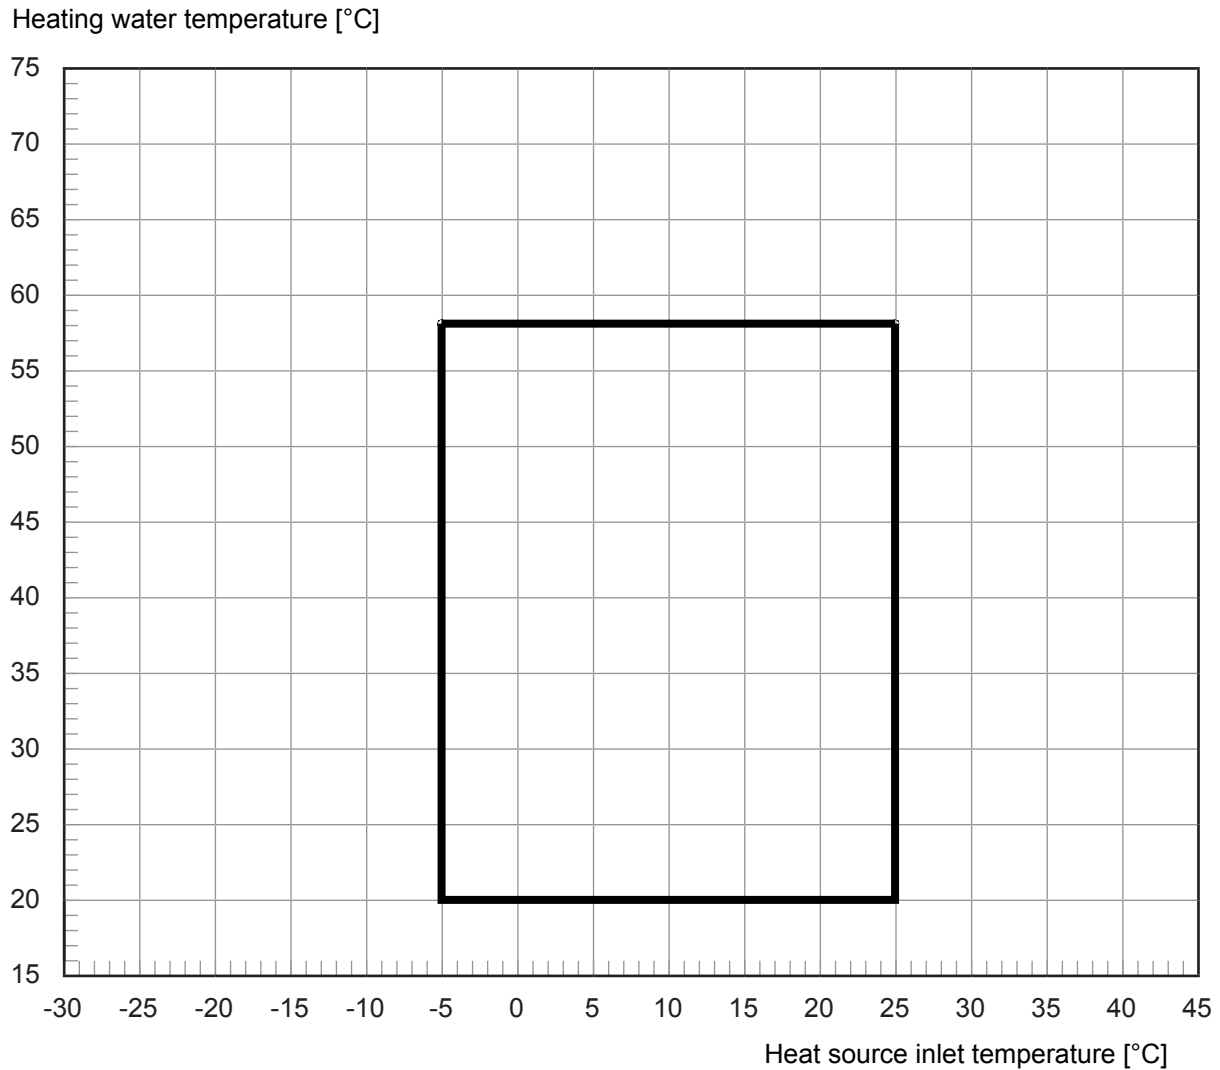

Note:  
The maximum possible flow temperature and the operating limits vary by +/- 2K due to component tolerances.  
The minimum volume flow specified in the device information must be ensured at the lower operating limit.  
In mono energy operating mode with the heating element activated, the maximum flow temperature increases by approximately 3K.